

Our Most Powerful and Versatile UV-A LED Flashlight!

OPTIMAX 365™

APPLICATIONS:

- Nondestructive Testing (NDT)
- Quality Control
- Fluorescent Leak Detection
- Industrial Inspection
- UVA Curing
- Photoactivation and UV-A Dosing
- Rare Document/Stamp/Artwork Examination
- And many more!



Powerful— Ultra-high intensity up to $50,000\mu\text{W}/\text{cm}^2$ of true UV-A (365 nm).

Instant-on Operation— Push the button and the lamp immediately reaches full power and is ready for use. Eliminates down time waiting for bulbs to warm up.


Portable & Rugged— Cordless. Use it anywhere! Stands up to heavy use in the field, shop or laboratory. Anodized aluminum lamp body minimizes corrosion.

Rechargeable— Powered by a rechargeable NiMH battery. Provides 90 minutes of continuous inspection between charges (AC and DC chargers included).

Long Life— 30,000-hour LED bulb. Electronic Intensity Stabilizer ensures consistent performance. Beam strength will not fade between charges!


Versatile— Meets MIL and ASTM specs for FPI and MPI.

The **OPTIMAX™ 365** comes complete with smart AC and DC chargers, UV-absorbing spectacles, belt holster and padded carrying case. AC charger available in 120V, 230V, 240V or 100V versions.


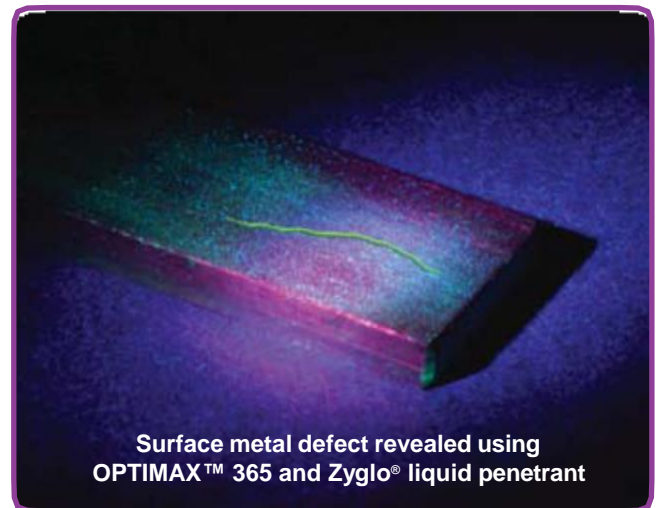


Surface metal defect revealed using OPTIMAX™ 365 and Zyglo® liquid penetrant


OPTIMAX™ 365 *High-Intensity, Versatile, True UV-A LED Flashlight*

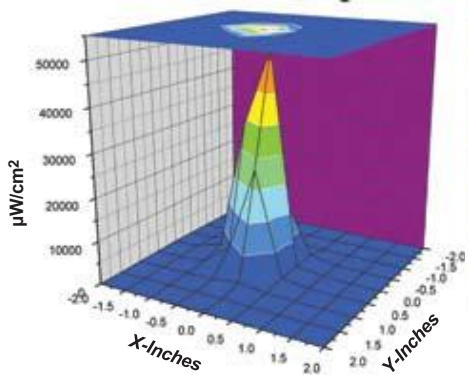



SURFACE CONTOUR PROFILE AT 6 IN (15 CM)

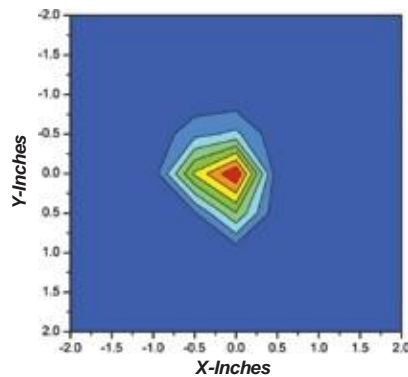


TOP INTENSITY PROFILE AT 6 IN (15 CM)

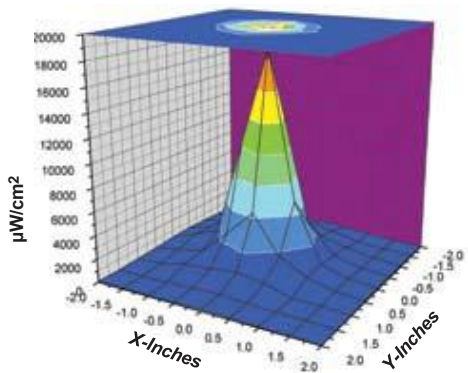


SURFACE CONTOUR PROFILE AT 15 IN (38 CM)

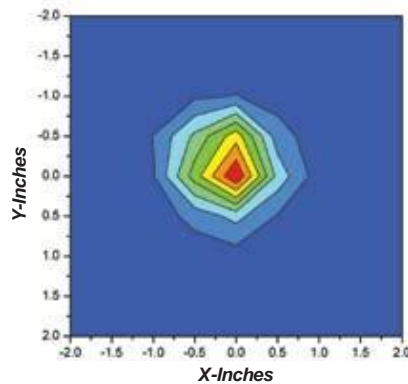

TOP INTENSITY PROFILE AT 15 IN (38 CM)

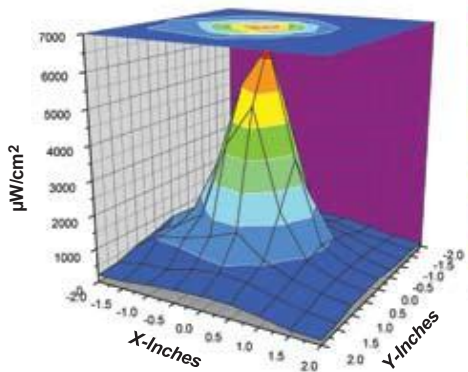

SURFACE CONTOUR PROFILE AT 24 IN (61 CM)

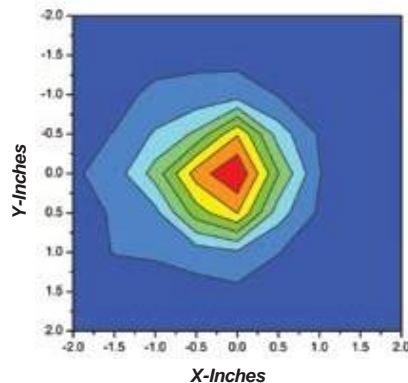

TOP INTENSITY PROFILE AT 24 IN (61 CM)

KEY FEATURES

- Electronic Intensity Stabilizer
- Very low visible light emission: under 2 foot-candles (20 Lux)
- 30,000-hour LED bulb life
- Battery strength indicator light
- Charge status indicator light
- Corrosion-resistant, anodized aluminum lamp body
- Rechargeable NiMH battery

SPECIFICATIONS

Product Number

OPX-365*

Lamp Style

Cordless LED Flashlight

Lamp Head Diameter

2 in (5.1 cm)

Length

8 in (20.3 cm)

Weight (with battery)

11.8 oz (335 g)

Power Requirement

3.6V, 2AH NiMH internal battery stick (rechargeable)

Run Time

90 minutes (continuous)

Charge Time

4 hours

Nominal Steady-State UV-A Intensity:

6" (15 cm)—50,000 $\mu\text{W}/\text{cm}^2$

15" (38 cm)—18,000 $\mu\text{W}/\text{cm}^2$

24" (61 cm)—6,000 $\mu\text{W}/\text{cm}^2$

* Model **OPX-365C** also available for curing applications.

Nominal Steady-State UV-A Intensity:

6" (15 cm)—60,000 $\mu\text{W}/\text{cm}^2$

NOTE: All readings taken with a Spectroline® AccuMAX™ Series meter.

British Columbia

140 - 8851 Beckwith Road
Richmond, B.C.
V6X 1V4
Tel: 604 276 8006
Toll Free: 1 800 677 8884

Alberta

6211 Roper Road
Edmonton, Alberta
T6B 3G6
Tel: 780 448 9575
Toll Free: 1 888 576 7756

Ontario

#48 1200 Speers Road
Oakville, Ontario
L6L 2X4
Tel: 289 430 0286
Fax: 780 466 1280